




## NTN bearing de Mexico, S.A.

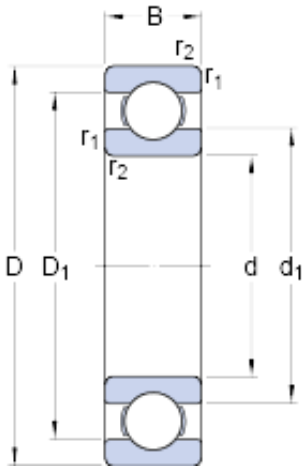

180 mm x 320 mm x 52 mm skf 6236 M Deep groove ball bearings

Bearing No. 6236 M

6236 M Bearing 2D drawings and 3D CAD models

Size	320x180x52 mm
Bore Diameter	320 mm
Outer Diameter	180 mm
Width	52 mm
d	180 mm
D	320 mm
B	52 mm
d <sub>1</sub>	226.6 mm
D <sub>1</sub>	273.3 mm
r <sub>1,2</sub> - min.	4 mm
d <sub>a</sub> - min.	197 mm
D <sub>a</sub> - max.	303 mm
r <sub>a</sub> - max.	3 mm
Basic dynamic load rating - C	229 kN
Basic static load rating - C <sub>0</sub>	240 kN
Fatigue load limit - P <sub>u</sub>	6.4 kN
Reference speed	4000 r/min
Limiting speed	3800 r/min
Calculation factor - k <sub>r</sub>	0.025
Calculation factor - f <sub>0</sub>	15.1
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



## NTN bearing de Mexico, S.A.

Weight / Kilogram	18.445
EAN	7316576618888
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Brass
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	180MM Bore; 320MM Outside Diameter; 52MM Outer Race Diameter; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	6236 M
Weight / LBS	40.63
Outside Diameter	12.598 Inch   320 Millimeter
Bore	7.087 Inch   180 Millimeter
Outer Race Width	2.047 Inch   52 Millimeter
bore diameter:	180 mm
static load capacity:	240 kN
outside diameter:	320 mm



## NTN bearing de Mexico, S.A.

precision rating:	ABEC 1 (ISO Class Normal)
overall width:	52 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Brass
closure type:	Open
outer ring width:	52 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	3 mm
snap ring included:	Without Snap Ring
maximum rpm:	3800 RPM
internal clearance:	C0
series:	62
dynamic load capacity:	229 kN
$d_1$	226.6 mm
$D_1$	273.3 mm
$r_{1,2}$ min.	4 mm
$d_a$ min.	197 mm
$D_a$ max.	303 mm
$r_a$ max.	3 mm
Basic dynamic load rating C	229 kN
Basic static load rating $C_0$	240 kN
Fatigue load limit $P_u$	6.4 kN
Calculation factor $k_r$	0.025
Calculation factor $f_0$	15.1
Mass bearing	17.8 kg